

Non-contact infrared thermometer featuring simple, one-touch measurement



Choose according to
your measurement
location.

Two Models

FT3700-20

Distance : Spot

12 : 1

Long-focus

For measuring temperature
over a wide area

FT3701-20

Distance : Spot


30 : 1

Long-focus, Precise-field

For measuring temperature
at a single point

Identify the measure-
ment location reliably.

Two-point laser marker

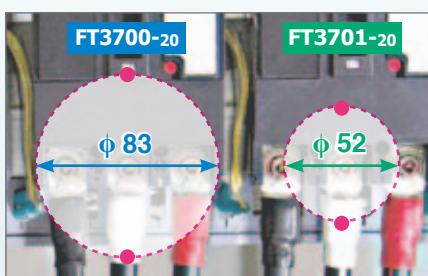

Measure the average
temperature inside a
circle whose diameter
is defined by the two
indicated points.

Example of a circuit-breaker
(At a distance of approx. 1 m)



Bright

Simulated measurement

Easily measure temperature in hazardous or unreachable locations



Useful Functions

- MAX, MIN, DIF (MAX-MIN), AVG measurement
- Alarm function
- Emissivity (ϵ) can be set based on the measurement target
- Continuous measurement
- Backlight



Specifications

(Accuracy guaranteed for 1 year)

	FT3700-20	FT3701-20
Measurement temperature range	-60.0 to 550.0 °C (-76 to 1022 °F) Guaranteed accuracy range is -35 to 500°C. (-31.0 to 932.0 °F)	-60.0 to 760.0 °C (-76 to 1400 °F) Guaranteed accuracy range is -35 to 500°C. (-31.0 to 932.0 °F)
Accuracy	0.0 to 100.0 °C (-32.0 to 212.0 °F) : ± 2 °C 100.1 to 500.0 °C (212.1 to 932.0 °F) : ± 2 °rdg. -35.0 to -0.1 °C (-31.0 to 31.9 °F) : ± 10 %rdg. ± 2 °C -60.0 to -35.1 °C (-76.0 to -31.1 °F) : Accuracy not specified 500.1 to 550.0 °C (932.0 to 1022 °F) (FT3700-20) 500.1 to 760.0 °C (932.0 to 1400 °F) (FT3701-20) : Accuracy not specified	
Accuracy guarantee for temperature and humidity	23 °C ± 3 °C (73 °F ± 5 °F) 80% RH or less (non-condensating)	
Temperature coefficient	Measurement accuracy $\times 0.1$ / °C	
Diameter of field of measurement	83 mm at 1000 mm (Distance : Spot = 12 : 1)	100 mm at 3000 mm (Distance : Spot = 30 : 1)
Response time	1 second (90%)	
Detection element	Thermopile	
Sighting	Two-point laser marker max 1mW (class 2), Red	
Measurement wavelength	8 to 14 μ m [Thermal emissivity compensation] 0.10 to 1.00 by steps of 0.01	
Functions	MAX/ MIN/ DIF (MAX-MIN)/ AVG measurement, Alarm function, Backlight function	
Operating temperature and humidity	0 to 50 °C (32 °F to 122 °F), 80%RH or less (non-condensating)	
Storage temperature and humidity	-10 to 50 °C (14 °F to 122 °F), 80%RH or less (non-condensating) 50 to 60 °C (122 °F to 140 °F), 70%RH or less (non-condensating)	
Applicable standards	EMC : EN61326 Laser : IEC60825-1 CLASS 2 LASER	
Power supply	LR03 alkaline battery $\times 2$, 150mVA [Continuous operating time: Approx. 140 hours] (When laser marker and backlight are OFF)	
Dimensions	Approx. 48 W \times 172 H \times 119 D mm (1.89" W \times 6.77" H \times 4.69" D) (excluding projections)	
Mass	Approx. 256 g (9.0 oz.) (including LR03 alkaline battery $\times 2$)	
Accessories	Instruction manual $\times 1$, LR03 alkaline battery $\times 2$ (supplied with this product for initial use only), Carrying case $\times 1$	

Measurement focus

D : Distance (mm) S : Spot (mm)

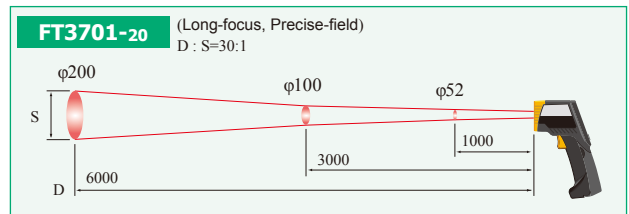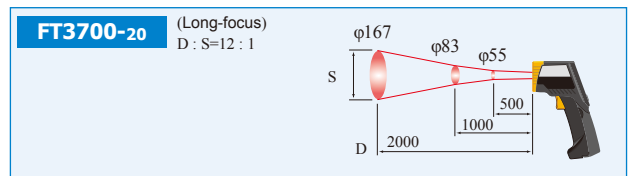

Model : INFRARED THERMOMETER

Model No. (Order Code) (Note)

FT3700-20 (Long-focus type)

FT3701-20 (Long focus, precise-field type)

Accessories: Instruction manual $\times 1$, LR03 alkaline battery $\times 2$, Carrying case $\times 1$



Carrying case



Laser Product Caution Notice

A caution label is attached to the thermometer. Be sure to observe the operating precautions on the label.

Contact infrared thermometer

Supports temperature management needs of various applications

- Compact and weighing only 160g
- More than 200 hours of continuous operation on a single battery
- An assortment of 9 optional temperature sensors



TEMPERATURE HiTESTER 3441
(Economically priced)

TEMPERATURE HiTESTER 3442
(Waterproof design)

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi
Ueda, Nagano 386-1192 Japan
www.hioki.com

HIOKI USA CORPORATION

TEL +1-609-409-9109 FAX +1-609-409-9108
hioki@hiokiusa.com / www.hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.
TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360
info@hioki.com.cn / www.hioki.cn

HIOKI SINGAPORE PTE. LTD.
TEL +65-6634-7677 FAX +65-6634-7477
info-sg@hioki.com.sg / www.hioki.com.sg

HIOKI KOREA CO., LTD.
TEL +82-2-2183-8847 FAX +82-2-2183-3360
info-kr@hioki.co.jp / www.hiokikorea.com

HIOKI EUROPE GmbH
TEL +49-6173-31856-0 FAX +49-6173-31856-25
hioki@hioki.eu / www.hioki.com

DISTRIBUTED BY

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.